

General

FSS is a new developed product series by NOTIFIER® for N6000 Fire Alarm Control Panel (FACP), which includes emergency telephone and voice command.

FSS Product Line Information

FSS-AFAWS: Fireman’s telephone extension set, compatible with FSS-TCC. Able to communicate with FACP. Includes front door, backbox and telephone assembly. These Emergency Telephone Stations provide a reliable means of communication for firefighters and other personnel.



N-6000 with FSS-TCC and FSS-VCC



Features

- Either recessed or surface mounting
- Heavy-duty construction.
- Door fit either recessed or surface enclosure.
- Keylock
- Red baked-enamel finish.
- Operation LED indicator
- Armored cable or standard telephone coiled cord.

Specification


- Operating Voltage : 15 ~ 27VDC
- Operating Temperature : 0 ~ 50 °C
- Relative Humidity : 10% ~ 95% RH, non-condensing
- Standby Current: 5mA
- Max. Operate Current : 35mA

- Dimensions: 390mm (H) × 220mm (W) × 90mm (D)

Wiring

Use shielded twisted-pair cable:

- RVSP-2 × 1.5mm²
- Maximum wiring distance 1,200m
- Connect “Out” Terminal with “In” Terminal

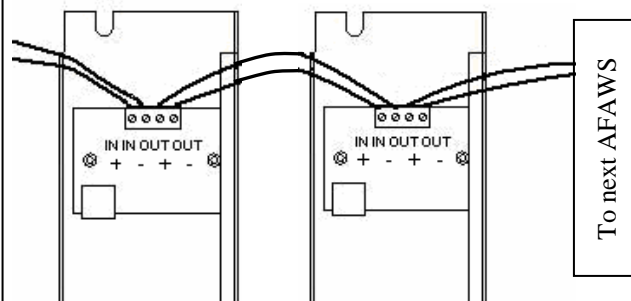

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, please contact NOTIFIER. Phone: +886 (2) 22487171 Fax: +886 (2) 22450927

FSS-TCC: Telephone command center. Need FSS-BM-1, FSS-CHS-4L and DPDW-1 for mounting.



FSS-VCC: Voice command center with solid state recorder/ player, including main unit, microphone and dress plate, can be used with AMP-150W and AMP-300W amplifier.



FSS-FHS: Fireman's telephone hand set. Handset comes with a coiled cord. The attached plug fits Fireman's Phone Jack, model FPJ, allowing firefighters to make direct communication with a central control area.



FPJ: Fireman's phone jack. Receptacle is semi-flush mounted with a single-gang box (box is not furnished with receptacle). The receptacle has a single phone jack mounted on an attractive, single-gang, stainless steel plate. Colorcoded wires, 6 inches long, are prewired to the jack to enable fast and accurate wiring to the system.



NOTIFIER® is registered trademark of Honeywell International Inc.

©2006 Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, please contact NOTIFIER. Phone: +886 (2) 22487171 Fax: +886 (2) 22450927

